




OPEN 501R ADSL Router Application Note

Default route in PPP

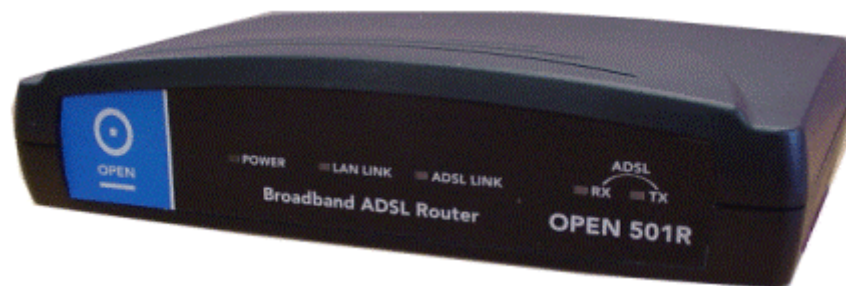

Copyright

Copyright© 2001 OPEN Networks Limited. All rights reserved. The content of this manual is subject to change without notice. The information and messages contained herein are proprietary to OPEN Networks Pty Limited. No part of this manual may be translated, transcribed, reproduced, in any form, or by any means without prior written permission by OPEN Networks Limited.

Introduction

It is easy to forget to set the default route in the OPEN 501R when connecting via PPP to the Internet. This results in a router that appears to be working correctly but you are unable to surf the web.

Set default route

1. From the console or telnet interface, go to the `MAIN/CONF/ROUTING/ROUTE` menu:

```
ADSL Router          Set Default Route in PPP          V2.420.3
-----
                Interface (TAB)                : ATM1
-----
                ^S - Add          ^L - Home Menu      ^X - Prev Menu

PATH> MAIN/CONF/ROUTING/Route
MESSAGE>
```

2. Change the `Interface` to `ATM1`.
3. Press Control-S to save the settings.
4. Write the configuration from the `MAIN/CONF/WRITE` menu and reboot the router.

Further Help

Further help can be found from:

- **Service Provider:** please contact your Service Provider.



Warning

- Before servicing or disassembling this equipment, always disconnect all power and telephone lines from the wall outlet.
- Use an appropriate power supply and a UL Listed telephone line cord. Specification of the power supply is clearly stated in Appendix B – Specification of the OPEN 501R User Guide.
- The socket outlet must be installed near the equipment and shall be easily accessible.
- The socket outlet must be protected by a suitable fuse at the local switch board for short circuit or over current protection.
- This product will not function without mains power.